



SPZLLR0AGR00 BLACK

HIGH - SPEED CONVECTION OVEN
2,4" DIGITAL LCD CONTROL

FUNCTIONAL CHARACTERISTICS

Display	Digital
Supply	Electric
Timer	-
Number of motors	1
Motor speeds	5 speed + inverter
Max cooking temperature	260°C
Probe	Single point PT1000
Cooking chamber material	AISI430
Opening door	Flap door
Chimney	20mm open
Humidification	-
Air injection	-
Version	Standard
Venteless	-



STANDARDS	
Certification	CE
TRAYS	
Trays rack	Sheet metal single level
Max tray load	3kg
Pizza paddle	SPZLFLA (optional)
Panini paddle	SPZLSHO (optional)
Pizza tray	85GRI00350 (optional)
Perforated pizza pan	85GRI00351 (Optional)
Panini grid	85GRI00405 (optional)
Crumbs tray	85VAS00091
Teflon sheet 270 x 270 mm	50GPP00090 (optional)
Teflon sheet 305 x 305 mm	50GPP00088 (optional)
Teflon tray 305 x 305 x 24 mm	50GPP00087 (optional)
Teflon tray 402 x 402 x 45 mm	50GPP00098 (optional)
DIMENSIONS	
Oven size with handle WxDxH	610 x 835 x 610 mm
Oven size without handle WxDxH	610 x 790 x 610 mm
Chamber size WxDxH	470 x 460 x 215 mm
Unit weight	58,8kg
PACKAGING	
Packaging	Pallet + carton box
Packaging size WxDxH	695 x 875 x 657 mm
Unit weight with packaging	91kg
Crate packaging size (optional)	644 x 884 x 626 mm
ELECTRICAL DATA	
HEATERS 5kW 50/60Hz	
Power	5,23kW
Frequency	50/60Hz
Power supply	380-415V 3N~
Amperage	8A
Power cord req.	5G1,5



WATER CONNECTION REQUIREMENTS

Humidification Water Inlet	-
Washing Water Inlet	-
Water drain	-
Max water hardness	-
Water pressure requirement min-max	-

CONSUMPTION

Humidification Water with solenoid valve	-
Humidification Water with pump	-
Rinse Water @2barG	-
Short Washing Water @2barG	-
Long Washing Water @2barG	-
Short Washing Detergent *	-
Long Washing Detergent *	-





CONNECTIVITY

USB	USB 2.0
Bluetooth	-
Wi-Fi	Standard
Cloud	Standard

ACCESSORIES

Pizza paddle	-
Panini paddle	-
Pizza grid	-
Panini grid	-
Teflon sheet 270 x 270 mm	-
Teflon sheet 305 x 305 mm	-
Teflon tray 305 x 305 x 24 mm	-
Hood	-
Control simulator	85KIT00167



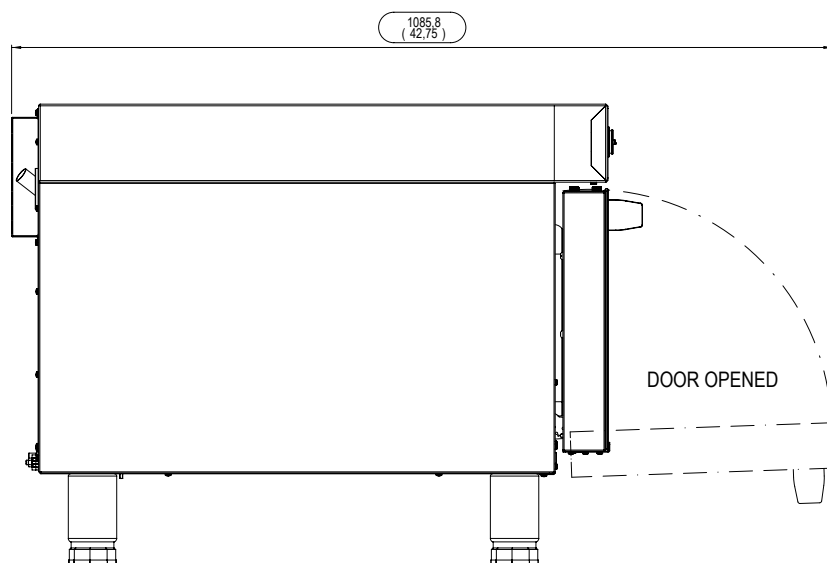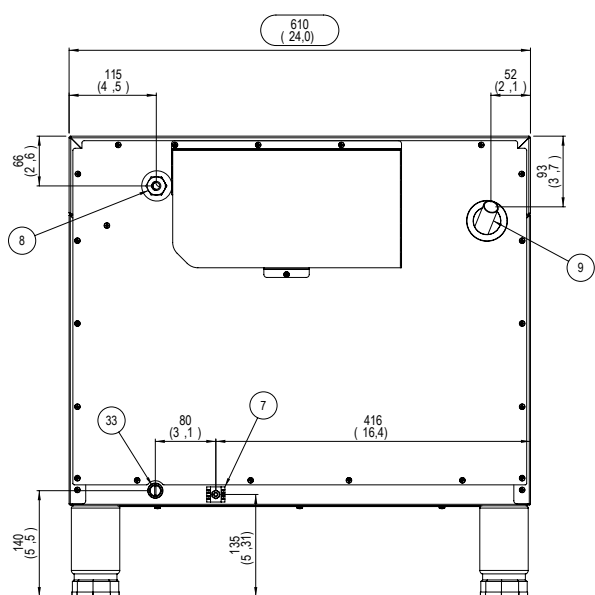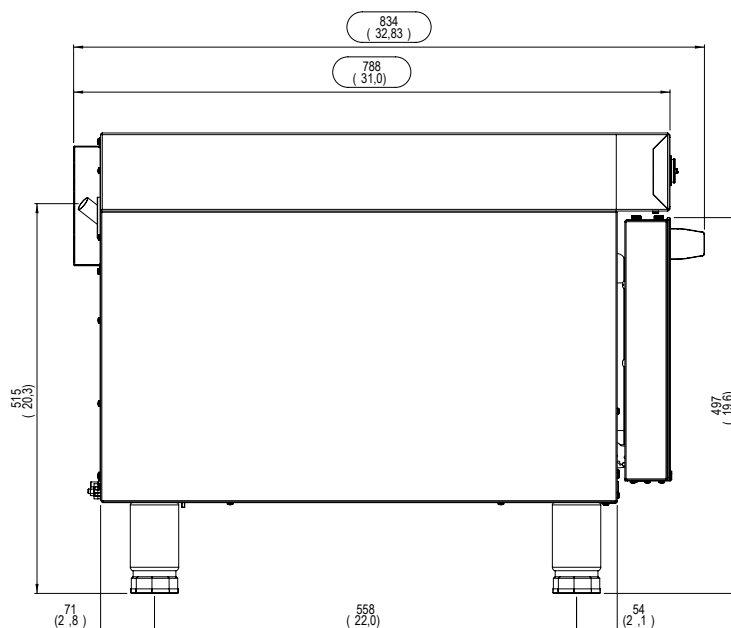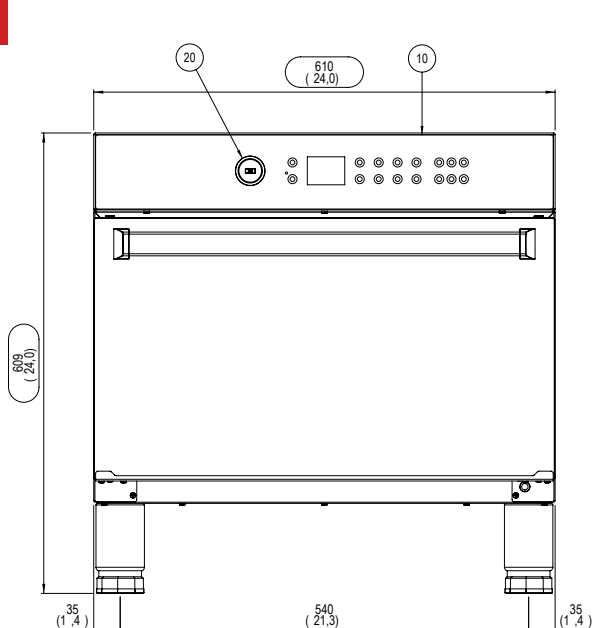

07.	UNIPOTENTIAL TERMINAL
08.	COMPRESSION CABLE GLAND
09.	HOT FUMES EXHAUST CHIMNEY (Ø20MM)

10.	DIGITAL CONTROL
20.	USB CONNECTION
33.	SAFETY THERMOSTAT

