

H5X® Element SST

Height: 28.5" Width: 7.4" Depth: 18.9"
(72.4cm) (18.8cm) (48.0cm)



- LED display provides simple temperature adjustment
- Thinsulate® tank insulation provides increased energy efficiency
- Programmable "Energy Saver Mode" reduces operating cost during idle periods
- The perfect tool for added control over quality coffee and tea
- Contemporary, space-saving design
- Digital thermostat provides constant and accurate temperatures of 60°- 212°F (15.6°-100°C)

Agency:



Specifications

Product #: 43600.0026

Water Access: Plumbed

Finish: Stainless

Faucet: Upper

Temp. Setting: 212°F (100.000°C)

Dispense: Pull & Hold

Additional Features

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ₂ O Temp.	Phase	# Wires plus Ground	Hertz
120	15.4	1850	No	-	-	60°F (15.5°C)	1	2	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	1/4" Male Flare Fitting	-

CAD Drawings

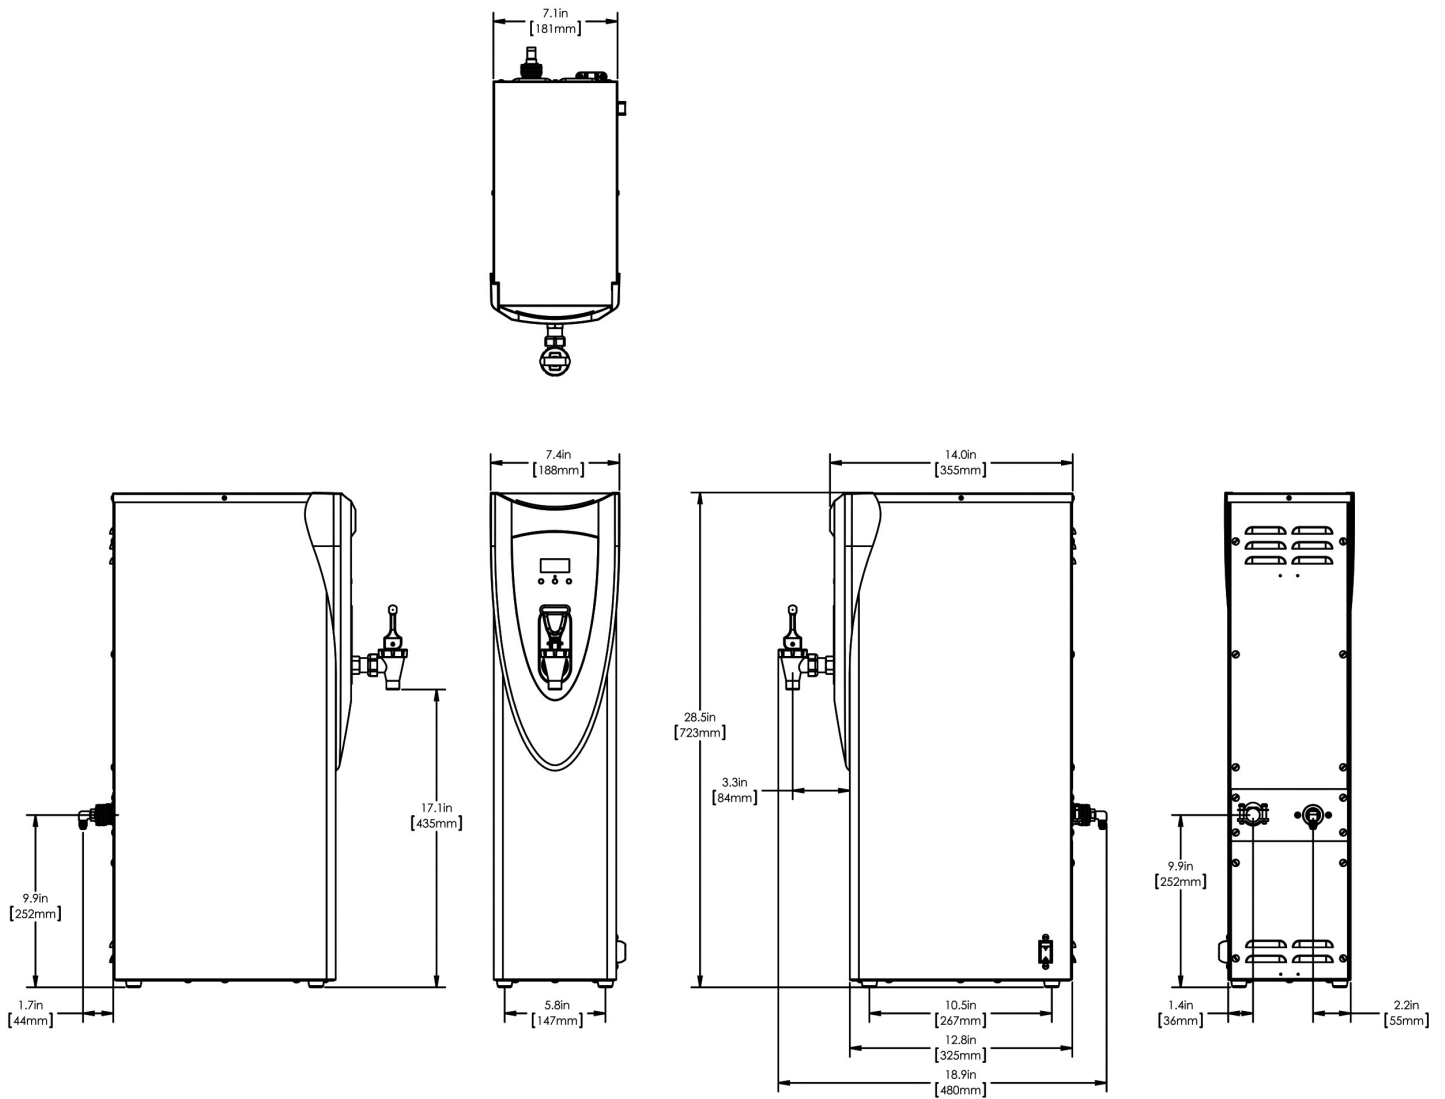
2D	Revit	KLC
●		

 **WARNING:**



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
08/31/2026





Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	28.5 in.	7.4 in.	18.9 in.	32.9 in.	11.0 in.	20.7 in.	32.500 lbs	4.338 ft ³
Metric	72.4 cm	18.8 cm	48.0 cm	83.7 cm	27.9 cm	52.5 cm	14.742 kgs	0.123 m ³



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
08/31/2026

Related Products & Accessories:H5X® Element SST(43600.0026)

 DRIP TRAY KIT (2.5"HT-HW2) Product #: 02497.0000	 DRIP TRAY Product #: 02545.0000	 COVER, DRIP TRAY-PERFORATED Product #: 02546.0000	 FOOT, RUBBER Product #: 02547.0000	 KIT, SHELF Product #: 12599.0000
 WALL BRKT KIT, FRONT MTG-H5 Product #: 13125.0003	 SYSTEM, WQ-55(2)5L Product #: 56000.0001¹	 SYSTEM, WQ-55(2)5 Product #: 56000.0004¹	 SYSTEM, WEQ-10(1.5)5L Product #: 56000.0024¹	 SYSTEM, WEQ-10(1.5)5 Product #: 56000.0027¹
 CARTRIDGE, WQ-55(2)5L Product #: 56000.0101¹	 CARTRIDGE, WQ-55(2)5 Product #: 56000.0104¹	 CARTRIDGE, WEQ-10 (1.5)5L Product #: 56000.0121¹	 CARTRIDGE, WEQ-10 (1.5)5 Product #: 56000.0122¹	

¹NSF Certified ²NSF Certified with spec sheet model listed ³NSF Certified under Solventum Purification ⁴NSF Certified under Vivreau Ltd ⁵NSF Certified under Zojirushi ⁶NSF Certified under Qins Inc ⁷NSF COMPONENT Certified



Serving & Holding Options: H5X® Element SST(43600.0026)

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.

¹NSF Certified ²NSF Certified with spec sheet model listed ³NSF Certified under Solventum Purification ⁴NSF Certified under Vivreau Ltd ⁵NSF Certified under Zojirushi ⁶NSF Certified under Qins Inc ⁷NSF COMPONENT Certified



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
08/31/2026

